
dyson airblade V

TECHNICAL SPECIFICATION



REAR ELEVATION

SIDE ELEVATION

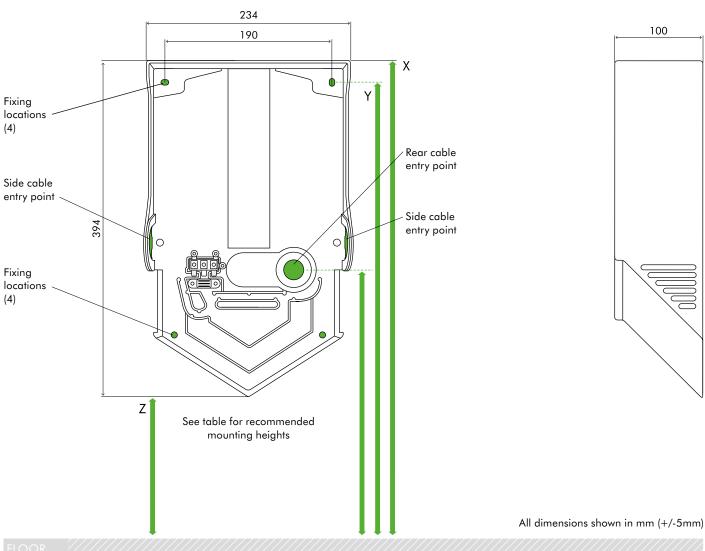

Recommended installation heigh	ts from floor		
Male	X 1324mm	Y 1300mm	Z 930mm
Female	X 1289mm	Y 1265mm	Z 895mm
Accessible	X 1074mm	Y 1050mm	Z 900mm
Child 5-8	X 952mm	Y 928mm	Z 558mm
Child 8-11	X 1052mm	Y 1028mm	Z 658mm
Child 11-14	X 1132mm	Y 1108mm	Z 738mm
Machine dimensions			
Height 394mm Width 234mm Depth 10)0mm		

Contact us for more information: AUS: 1800 426 337 www.dysonairblade.com.au NZ: 0800 397 667 www.dysonairblade.co.nz

Minimum clearance

220mm clearance either side and 30mm above machine.

Cable entry point from floor	
Male	1089mm
Female	1054mm
Accessible	1059mm
Child 5-8	717mm
Child 8-11	817mm
Child 11-14	897mm

dyson airblade V



 Electrical	
Input voltage/Frequency: 160-264V 50-60 Hz	
Rated power: 1600 W	
Motor type: Dyson digital motor – brushless DC Motor	
Motor switching rate: 6,000 per second	
Motor speed: 90,000 rpm	
Operating temperature range: 0°– 40°C	
Heater type: None	
Standby power consumption: Less than 0.5 W	
Construction	
Casing construction: Polycarbonate casing	
Antibacterial coating type: AB12 (Sprayed nickel) contains antibacterial additive in paint. AB12 (White) contains antibacterial moulded additive. Can help prevent the growth of bacteria.	
Colour finish: AB12 Sprayed nickel moulded plastic. AB12 White moulded plastic.	
Back plate/mounting bracket construction: ABS/PBT Plastic	
Exterior screw type: Anti-tamper M4 Pin-Hex	
Water ingress protection to IP24	
Filter	
HEPA filter (Glass fibre and fleece prelayer)	
Bacteria removal 99.9%	
Operation	
Proximity capacitive sensor. Touch free operation.	
Hand dry time measurement: 10 seconds. (Measurement based on National Sanitation Foundation Protocol P.335))
Operation lock-out period: 30 seconds	
Airspeed at apertures: 690km/h	
Operating airflow: Up to 30 l/s	
Logistics	
Serial number prefix: AB12 (Sprayed nickel) FS8; AB12 (White) FS7	
Single unit order code: AB12 HV (Sprayed nickel) 301827-01; AB12 HV (White) 301825-01	
Net weight: AB12 2.8kg	
Packaged weight: AB12 4.0kg	
Packaged dimensions: H145 × W455 × D274 mm	
Unit barcode: AB12 (Sprayed nickel) 5025 1550 1574 2; AB12 (White) 5025 1550 1573 5	



nge

ckel

White



C A R B O N T R U S T

CO2 MEASURED

Standard guarantee 5 year guarantee



TESTED. CERTIFIED. HYGIENIC

The Carbon label is a trademark of the Carbon Trust. The NSF logo is the registered trade mark of NSF International.